

Solid-state Twin Timer

H3DE-F

- Operates in flicker-OFF or flicker-ON start mode with one Unit.
- Independent ON- and OFF-time settings. Combinations of long ON- or OFF-time and short OFF- or ON-time setting are possible.
- Long time range from 0.1 s to 12 h for both ON and OFF time settings.



Ordering Information

| Operating mode | Supply voltage | Model |
|------------------------------|-------------------|--------|
| Flicker-OFF/Flicker-ON start | 24 to 230 VAC/VDC | H3DE-F |

■ Model Number Legend

H3DE -
1

1. F: Twin timers

■ Accessories (Order Separately)

| | | |
|-----------------------|------------------------|-----------|
| Mounting Track | 50 cm (l) x 7.3 mm (t) | PFP-50N |
| | 1 m (l) x 7.3 mm (t) | PFP-100N |
| | 1 m (l) x 16 mm (t) | PFP-100N2 |
| End Plate | PFP-M | |
| Spacer | PFP-S | |

Specifications

■ General

| Item | H3DE-F |
|----------------------------------|--|
| Operating mode | Flicker-OFF/Flicker-ON start |
| Operating/Reset method | Time-limit operation/Time-limit reset or self-reset |
| Terminal block | Clamps two 2.5 mm ² max. bar terminals without sleeves |
| Terminal screw tightening torque | 0.98 N • m max. {approx. 10 kgf • cm max.} |
| Output type | Relay: SPDT |
| Mounting method | DIN track mounting |
| Attachment | Nameplate |
| Approved standards | UL508, CSA 22.2 No.14 Conforms to EN61812-1 (VDE0435/P2021), IEC60664-1 (VDE0110) 4 kV/2, VDE0106/P 100 Conforms to IEC60947-5-1 (AC-13; 250 V 5A/AC-15; 250 V 3 A/DC-13; 30 V 0.1 A) Conforms to EN50081-1 and EN50082-2 |

■ Time Ranges

| Time scale display (see note 1) | Time unit display | | | |
|------------------------------------|-------------------|-------------|----------------|--------------|
| | sec | 10 s | min | hrs |
| x 0.1 | 0.1 to 1.2 s | 1 to 12 s | 0.1 to 1.2 min | 0.1 to 1.2 h |
| x 1 | 1 to 12 s | 10 to 120 s | 1 to 12 min | 1 to 12 h |

- Note:** 1. Time scale display is applied commonly for ON and OFF time.
2. When the main dial is set to "0" for all settings, the output will operate instantaneously.

■ Ratings

| | |
|---------------------------------|---|
| Rated supply voltage (see note) | 24 to 230 VAC/VDC (50/60 Hz) |
| Operating voltage range | 85% to 110% of rated supply voltage |
| Power reset | Minimum power-off time: 0.1 s |
| Reset voltage | 2.4 VAC/DC max. |
| Power consumption | AC: Approx. 3.1 VA (1.8 W) at 230 VAC DC: Approx. 0.8 W at 24 VDC |
| Control output | Contact output: 5 A at 250 VAC with resistive load ($\cos\phi = 1$) 5 A at 30 VDC with resistive load ($\cos\phi = 1$) |
| Ambient temperature | Operating: -10°C to 55°C (with no icing) Storage: -25°C to 65°C (with no icing) |
| Ambient humidity | Operating: 35% to 85% |

Note: DC ripple rate: 20% max.

■ Characteristics

| | |
|-----------------------------------|---|
| Accuracy of operating time | ±1% max. of FS (±1% ±10 ms max. at 1.2-s range) |
| Setting error | ±10% ± 0.05 s max. of FS |
| Influence of voltage | ±0.5% max. of FS (±0.5% ±10 ms max. at 1.2-s range) |
| Influence of temperature | ±2% max. of FS (±2% ± 10 ms max. at 1.2-s range) |
| Insulation resistance | 100 MΩ min. at 500 VDC |
| Dielectric strength | Between current-carrying metal parts and exposed non-current-carrying metal parts: 2,000 VAC (50/60 Hz) for 1 min. Between control output terminals and operating circuit: 2,000 VAC (50/60 Hz) for 1 min. Between contacts not located next to each other: 1,000 VAC (50/60 Hz) for 1 min. |
| Impulse withstand voltage | 3 kV (between power supply terminals) 4.5 kV (between current-carrying metal parts and exposed non-current-carrying metal parts) |
| Noise immunity | Square-wave noise generated by noise simulator (pulse width: 100 ns/1 μs, 1-ns rise) ±1.5 kV |
| Static immunity | Malfunction: 4 kV Destruction: 8 kV |
| Vibration resistance | Malfunction: 0.5-mm single amplitude at 10 to 55 Hz Destruction: 0.75-mm single amplitude at 10 to 55 Hz |
| Shock resistance | Malfunction: 100 m/s ² (approximately 10G) Destruction: 1,000 m/s ² (approximately 100G) |
| Life expectancy | Mechanical: 10 million operations min. (under no load at 1,800 operations/h) Electrical: 100,000 operations min. (5 A at 250 VAC, resistive load at 360 operations/h) |
| EMC | (EMI): EN50081-1 Emission Enclosure: EN55022 class B Emission AC Mains: EN55022 class B Harmonic Current: EN61000-3-2 Voltage Fluctuation and Flickering: EN61000-3-3 (EMS): EN50082-2 Immunity ESD: EN61000-4-2: 4 kV contact discharge (level 2) 8 kV air discharge (level 3) Immunity RF-interference from AM Radio Waves: ENV50140: 10 V/m (80 MHz and 1 GHz) (level 3) Immunity RF-interference from Pulse-modulated Radio Waves: ENV50204: 10 V/m (900 ±5 MHz) (level 3) ENV50141: 10 V (0.15 to 80 MHz) (level 3) Immunity Conducted Disturbance: ENV50141: 10 V (0.15 to 80 MHz) (level 3) Immunity Burst: EN61000-4-4: 2 kV power line (level 3) 2 kV I/O signal line (level 4) |
| Enclosure rating | IP30 (IP20 for terminal block) |
| Weight | Approx. 110 g |

Note: For reference:



A maximum current of 0.15 A can be switched at 125 VDC (cosφ=1).

A maximum current of 0.1 A can be switched if L/R is 7 ms.

In both cases, a life of 100,000 operations can be expected.

The minimum applicable load is 10 mA at 5 VDC (failure level: P).

Nomenclature

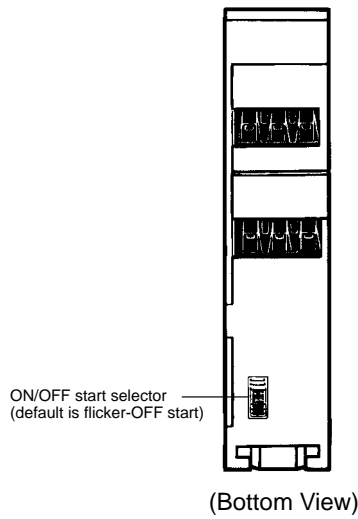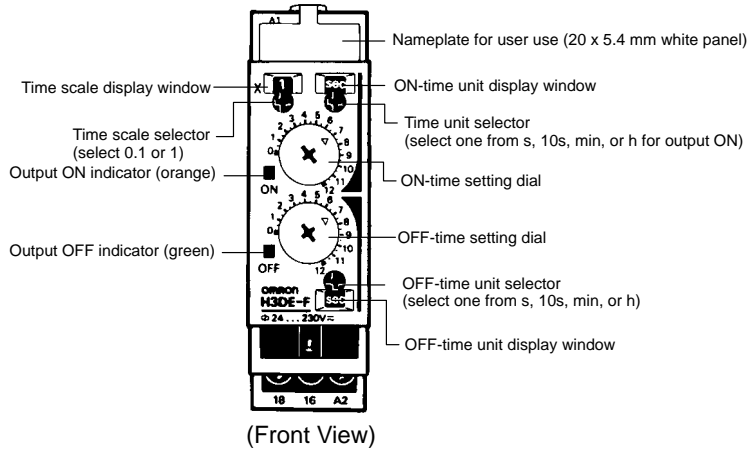


ON/OFF Start Selector Switch Settings

| Setting | Operating mode |
|---------|-------------------|
| | Flicker-ON start |
| | Flicker-OFF start |

Operation

■ Block Diagram

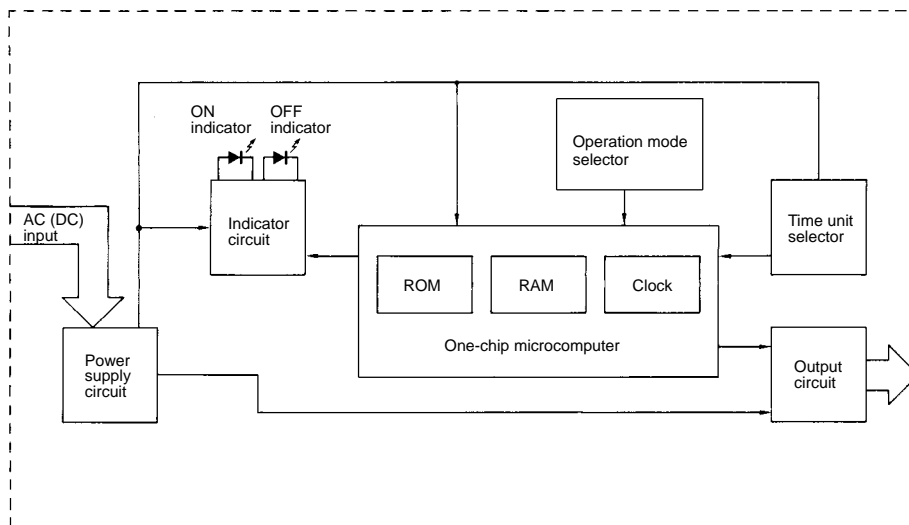

■ I/O Function

| | | |
|---------|----------------|--|
| Inputs | --- | |
| Outputs | Control output | Outputs are turned ON/OFF according to the time set by the ON-and OFF-time setting dial. |


■ Basic Operation

Time Unit Selection

The time unit display window for output ON is located on the upper-right side of the front panel above the corresponding time unit selector.


The time unit display window for output OFF is located on the lower-right side of the front panel below the corresponding time unit selector.

According to the setting of each time unit selector, "sec" for seconds, "10s" for 10 seconds, "min" for minutes, or "hrs" for hours will appear in the corresponding time unit display window.

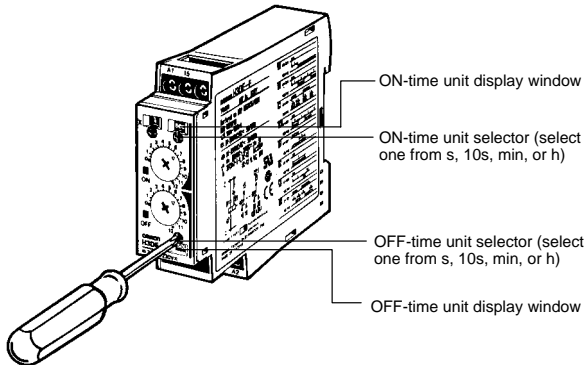

Time Scale Selection

The time scale selector on the upper-left side of the front panel can be set to 0.1 or 1 as a magnification coefficient.

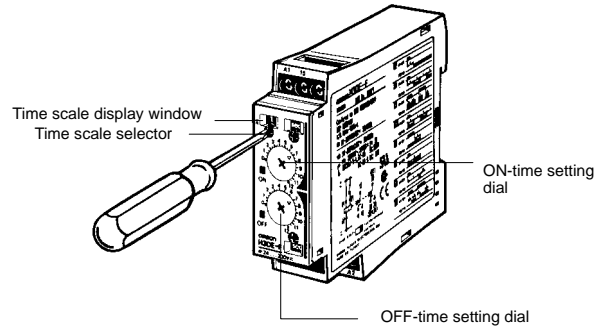

Time Setting

Use the ON/OFF-time setting dial to set the ON/OFF time.




■ Timing Charts

| Operating mode | Timing chart | |
|-------------------|--|--|
| Flicker-OFF start | <p>Power (A₁ and A₂)</p> <p>Output relay: NO 15 and 18 (ON indicator)</p> <p>Output relay: NC 15 and 16</p> <p>OFF indicator</p> | <p>t_{ON}: ON set time t_{OFF}: OFF set time</p> |
| Flicker-ON start | <p>Power (A₁ and A₂)</p> <p>Output relay: NO 15 and 18 (ON indicator)</p> <p>Output relay: NC 15 and 16</p> <p>OFF indicator</p> | <p>t_{ON}: ON set time t_{OFF}: OFF set time</p> |

- Note:**
1. The reset time requires a minimum of 0.1 s.
 2. When power is supplied in flicker-ON start mode, the OFF indicator lights momentarily. This, however, has no effect on the performance of the Timer.


Dimensions

H3DE-F

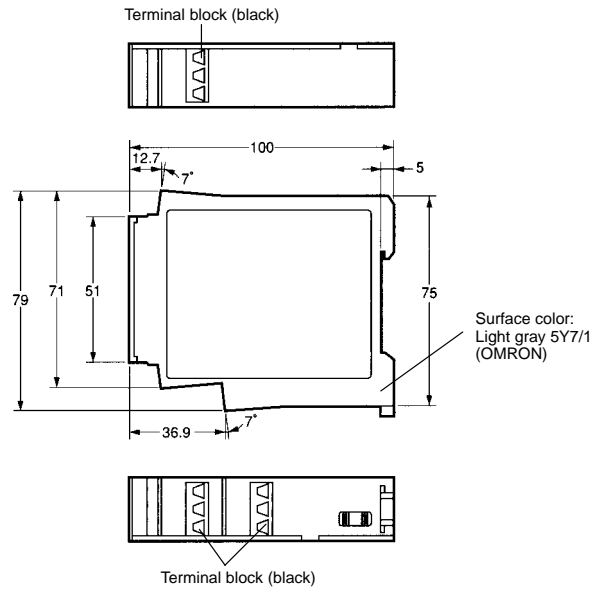

Installation

■ Terminal Arrangement

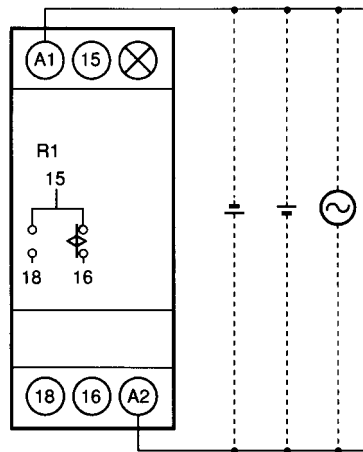

Note: DC supply voltage does not require the designation of polarity.